


The Xyron Pro2500 Multi-Purpose A1/A2 Machine.

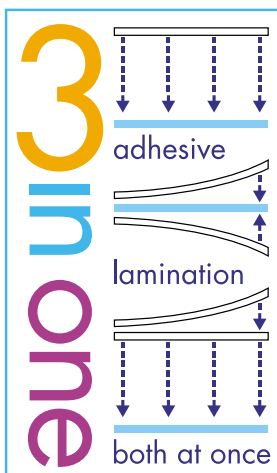

Xyron's Cold Lamination, Encapsulation and Adhesive Application System.

- Clean, simple, easy to use
- For client presentation, mock-ups, POP material and posters
- Range of adhesives – Re-positional or permanent
- Single sided lamination
- Double sided lamination

The Xyron Pro2500

Whether applying adhesive in the studio for client presentation, mock-ups, story-boards, point of purchase material or large format posters, the Xyron Pro2500 instantly applies adhesive without heat or electricity. What's more, this machine also allows double sided edge-to-edge encapsulation - meaning that artwork can be cropped to size without curling or peeling. Simply feed an item in, turn the handle and trim. No smell, no mess and no waiting. The patented roll-set system allows users to quickly switch between applications, making the Xyron Pro2500 the most versatile machine available. Its improved adhesive formula, coupled with higher-pressure rollers, improves both transfer and bonding quality.



Product Descriptions

AT400-300 Permanent Adhesive Transfer: A strong adhesive that creates a permanent bond on most surfaces.

AT406-170 Re-positional (Acid Free) Transfer: Allows you to re-position your item over and over again. It will allow easy removal from mount-boards, paper, walls and most other surfaces.*


DL403-300 Double Sided Laminate: A high quality film suitable for use on a variety of substrates. The film has superior adhesion, excellent clarity and is compatible with most media.

SL403-300 Single Side Lamination: Xyron's general use laminate with superior adhesion for a perfect finish whatever the substrate.

LAT405-300 Combination One Side Lamination/One Side Permanent Adhesive: Xyron's general use laminate on the top surface and a permanent adhesive on the reverse.

LAT406-170 Combination One Side Lamination/One Side Re-positional Adhesive: Xyron's general use laminate on the top surface and a re-positional adhesive on the reverse.*

Key



Specifications

Product Code: 23652

Footprint: 63 cm L x 86.8 cm W x 57.5 cm H x

Document Width (Max): 63.5 cm

Weight: 40.8 kg

Document Length (Max): 30.5 m

Packaged Weight: 47.6 kg

Power Source: None

Document Thickness (Max): 4.36 mm

Cutter: Built in removable, replaceable cutter

2500 CARTRIDGES

Esselte (Part Number)	Alpha (Part Number)	Product Description	Material Length	Material Width	Laminate & Adhesive Combination thickness (Per Side)	Mounting Adhesive Thickness	Adhesive pH	Mounting Adhesive Strength (1:10; 10 High)	PAT Approved
Adhesive Application Cartridges (AT Series):									
23627	AT400-300	Permanent Adhesive Transfer	90 m	63.5 cm	N/A	15.2 mic	5.0 - 7.0	8	Yes
23628	AT406-170	Re-positional (Acid Free) Adhesive Transfer	51 m	63.5 cm	N/A	15.2 mic	Acid Free	~	Yes
Double or Single Sided Lamination Cartridges (DL & SL Series):									
23629	DL403-300	Double Sided Laminate	90 m	63.5 cm	62.5 mic	N/A	6.0 - 6.4	N/A	Yes
23630	SL403-300	Single Sided Laminate	90 m	63.5 cm	62.5 mic	N/A	6.0 - 6.4	N/A	Yes
Combination One Side Lamination/One Side Adhesive Application (LAT Series):									
23631	LAT405-300	1 Side Laminate/1 Side Adhesive Application General Use Laminate/High Tack Adhesive	90 m	63.5 cm	62.5 mic	15.2 mic	Lam: 6.0 - 6.4 Adh: 5.0 - 7.0	8	Yes
23632	LAT406-300	1 Side Laminate/1 Side Adhesive Application General Use Laminate/Re-positional	51 m	63.5 cm	62.5 mic	27.9 mic	Lam: 6.0 - 6.4 Adh: Acid Free	~	Yes

* Please test before each application.